

MATERIAL:

Contacts: Copper Alloy
 Housing: High temperature thermoplastic, UL 94V-0 Rated.
 Shell: Brass

RoHS COMPLIANT

FINISH:

Contact: Selective Gold plated on mating area.
 Shell: Nickel plated.

Ordering Information:





0850B * BD * 11
 1 2

1.Contact plating:

- F=Selective gold flash on contact area over 30µ"min. nickel overall
- J=15µ"min. Selective gold on contact area over 30µ"min. nickel overall
- K=30µ"min. Selective gold on contact area over 30µ"min. nickel overall

2.Color of insulator:

- 0=White(Tray) 1=Black(Tray) 2=Gray(Tray)

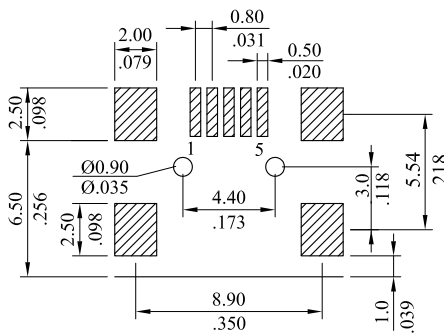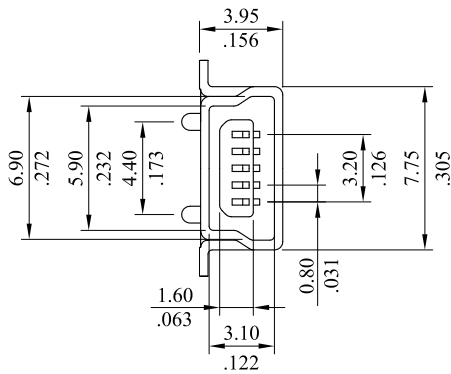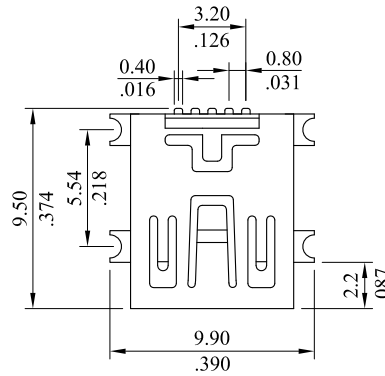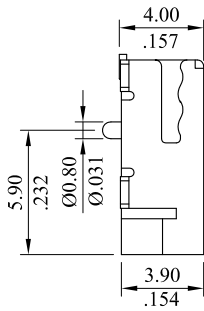

Recommended PCB Pattern

leoco LEOCO CORPORATION

GENERAL TOLERANCES:
(UNLESS SPECIFIED)

	mm	inch
1 PLACE	± 0.30	± --
2 PLACES	± 0.20	± .012
3 PLACES	± 0.10	± .008
4 PLACES	± --	± .004

ANGULAR ± (1°)

APPROVED:


DATE: JASON

CHECKED:

DATE: CHARD

DRAWN:

DATE: ANGEL



PART NO.:

0850B*BD*11

TITLE:

MINI USB 5PIN FEMALE
(B TYPE ,SMT TYPE)

DRAWING NO.:

085002S

REV.	ECO. NO.	CHG.	APP.	UNITS	SCALE	SIZE	SHEET	REV.
				mm inch	3:1	A4	1/1	A