

* Insulator:Nylon 6T,UL94V-0

* Solder Tabs:Phosphor Bronze/Tin-plated

* Pin: Brass/Tin-plated

Ordering Information:



1252P ** M H 00
1 2 3

1.No.of circuits



2.M:SMT Type

3.H:Right Angle Type

RoHS COMPLIANT

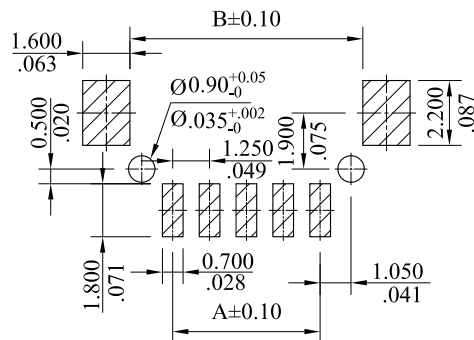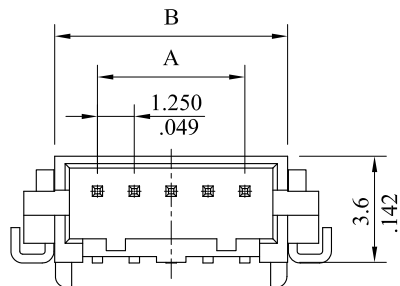

Recommend Hole Pattern

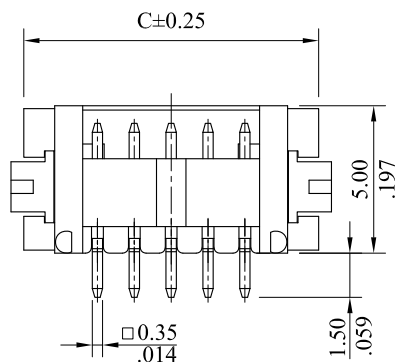

No.of circuits	DIM. A	DIM. B	DIM. C	No.of circuits	DIM. A	DIM. B	DIM. C
2	1.25(.049)	4.15(.163)	6.25(.246)	12	13.75(.541)	16.65(.656)	18.75(.738)
3	2.50(.098)	5.40(.213)	7.50(.295)	13	15.00(.591)	17.90(.705)	20.00(.787)
4	3.75(.148)	6.65(.262)	8.75(.344)	14	16.25(.640)	19.15(.754)	21.25(.837)
5	5.00(.197)	7.90(.311)	10.00(.394)	15	17.50(.689)	20.40(.803)	22.50(.886)
6	6.25(.246)	9.15(.360)	11.25(.443)	16	18.75(.738)	21.65(.852)	23.75(.935)
7	7.50(.295)	10.40(.409)	12.50(.492)	17	20.00(.787)	22.90(.902)	25.00(.984)
8	8.75(.344)	11.65(.459)	13.75(.541)	18	21.25(.837)	24.15(.951)	26.25(1.033)
9	10.00(.394)	12.90(.508)	15.00(.591)	19	22.50(.886)	25.40(1.000)	27.50(1.083)
10	11.25(.443)	14.15(.557)	16.25(.640)	20	23.75(.935)	26.65(1.049)	28.75(1.132)
11	12.50(.492)	15.40(.606)	17.50(.689)				

				LEOCO CORPORATION		APPROVED:		PART NO.:						
				GENERAL TOLERANCES: (UNLESS SPECIFIED)		DATE:		1252P**MH00						
						CHECKED:		TITLE:						
C	ES101209					DATE:		HEADER						
B	ES070872					DRAWN:		DRAWING NO.:						
A	DWG REL					DATE:		125205S						
REV.	ECO. NO.	CHG.	APP.			ANGULAR ± (1°)				UNITS	SCALE	SIZE	SHEET	REV.
				mm	inch					4:1	A4	1/1	C	