
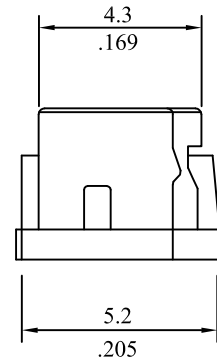
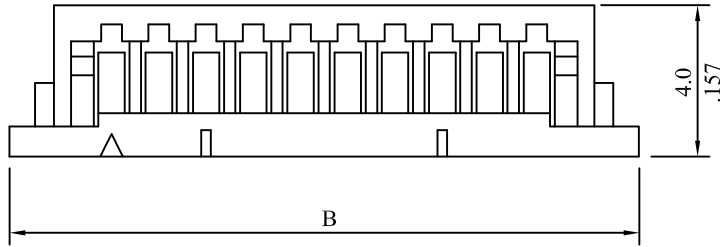


RoHS COMPLIANT

Material :

* Insulator : UL 94V-0 Nylon 6/6

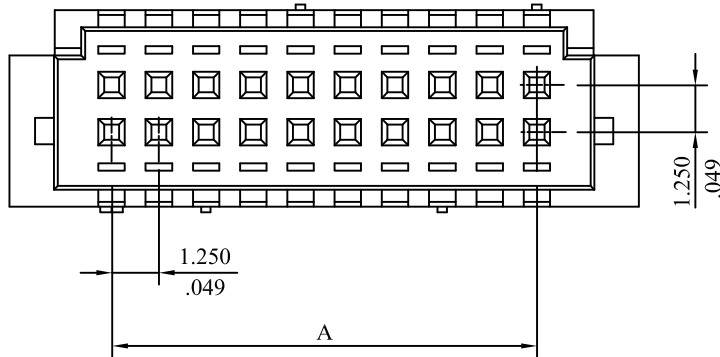

| No.of circuits | DIM. A | DIM. B |
|----------------|-------------|--------------|
| 10 | 5.00(.197) | 10.40(.409) |
| 14 | 7.50(.295) | 12.90(.508) |
| 20 | 11.25(.443) | 16.65(.656) |
| 30 | 17.50(.689) | 22.90(.902) |
| 40 | 23.75(.935) | 29.15(1.148) |

| | | | | | | | | | | | | |
|------|----------|------|------|-------------------|---|-----------|-------------|--------------|-------|------|-------|------|
| E | ES101214 | | | LEOCO CORPORATION | APPROVED: | PART NO.: | | | | | | |
| D | ES081001 | | | | GENERAL TOLERANCES: (UNLESS SPECIFIED) | DATE: | 1262S**0000 | | | | | |
| C | ES050841 | | | mm | | inch | CHECKED: | TITLE: | | | | |
| B | E990344 | | | 1 PLACE | ± 0.30 | ± -- | DATE: | HOUSING | | | | |
| A | DWG REL | | | 2 PLACES | ± 0.20 | ± .012 | DRAWN: | DRAWING NO.: | | | | |
| REV. | ECO. NO. | CHG. | APP. | 3 PLACES | ± 0.10 | ± .008 | DATE: | 126202S | | | | |
| | | | | 4 PLACES | ± -- | ± .004 | | UNITS | SCALE | SIZE | SHEET | REV. |
| | | | | ANGULAR ± (1°) | | mm/inch | | 5:1 | A4 | 1/1 | E | |