

RoHS COMPLIANT

Material:



a. Housing: Glass Filled Polyester, UL94V-0, Red

b. Cover: Glass Filled Polyester, UL94V-0, Red


c. Male Contact: Phosphor Bronze

Tin over Nickel Plating

Acceptable Wire: AWG 28, UL style 2651

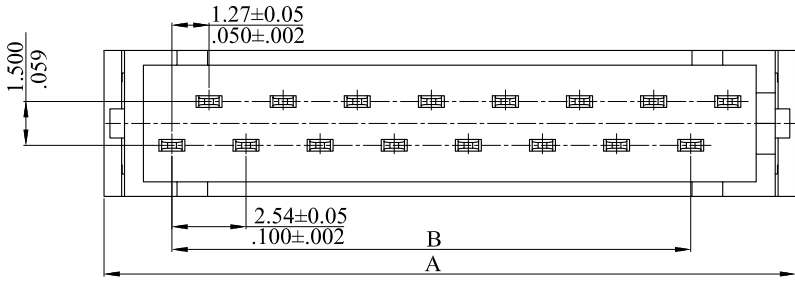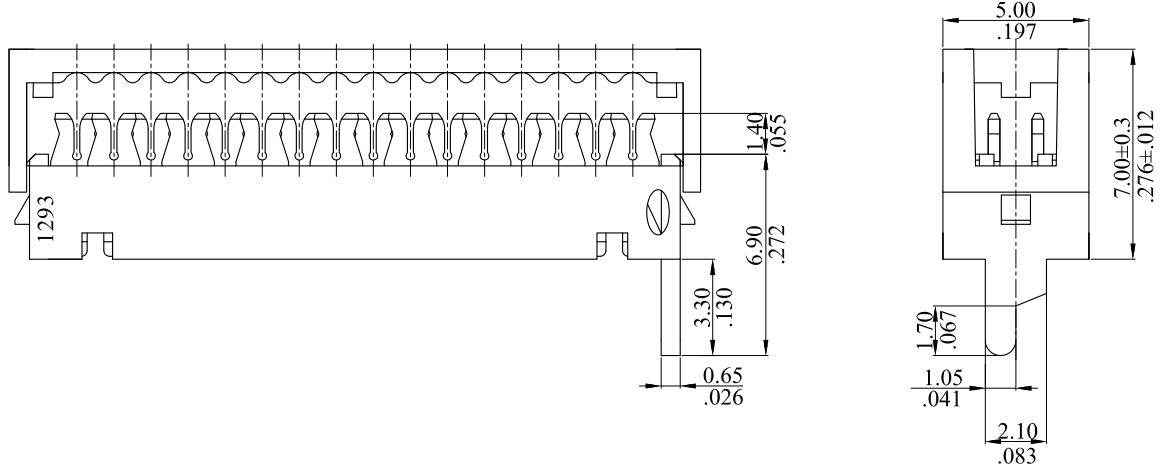

24	33.85	27.94
22	31.31	25.40
20	28.77	22.86
18	26.23	20.32
16	23.69	17.78
14	21.15	15.24
12	18.61	12.70
10	16.07	10.16
08	13.53	7.62
06	10.99	5.08
04	8.45	2.54
CIRCUITS	DIM.A.	DIM.B.

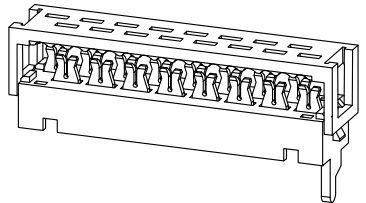

				LEOCO CORPORATION		APPROVED:		PART NO.:					
				GENERAL TOLERANCES: (UNLESS SPECIFIED)		DATE:		1293S**0000					
						CHECKED:		TITLE:					
						DATE:		1.27mm IDC SOCKET					
						DRAWN:		DRAWING NO.:					
						DATE:		129301S					
B	ES101214			1 PLACE	± 0.30	± --		UNITS	SCALE	SIZE	SHEET	REV.	
A	DWG REL			2 PLACES	± 0.20	± .012							
				3 PLACES	± 0.10	± .008		mm	4:1	A4	1/1	B	
REV.	ECO. NO.	CHG.	APP.	4 PLACES	± --	± .004							
				ANGULAR ± (1°)									