
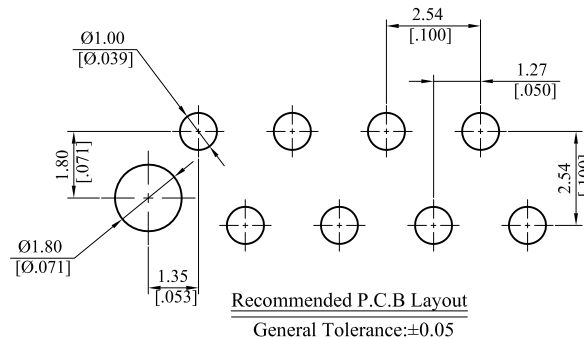


RoHS COMPLIANT

CUSTOMER DRAWING

REV.	ECO. NO.	DESCRIPTION	DATE
A	DWG. REL.	APPROVED	2017.06.07
B	ES170916	<small>Holes dimension 5.92±0.20±5.10±.12</small> <small>Flare dimension 3.10±3.05</small>	2017.09.28

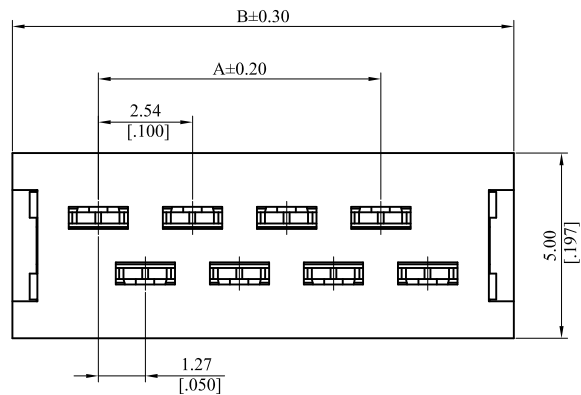

Note:



Material:
 Insulator: Thermoplastic,UL94 V - 0
 Contact: Phosphor Bronze
 Specification:
 Current Rating: 1A AC, DC
 Voltage Rating: 30V AC, DC
 Temperature Rating: -40°C ~ +85°C

General Part Number:

1293P ** V ** *
 $\frac{1}{2} \frac{3}{3}$

- No. of circuits(04 ~ 24)
- Plating:
 T = Tin plated 120µ" min. over 30" min. Nickel underplating overall
 3.9T=Bright red
 JT=Purplish red

A=2.54mm* No.of (circuits/2-1)
 B=A+5.90mm

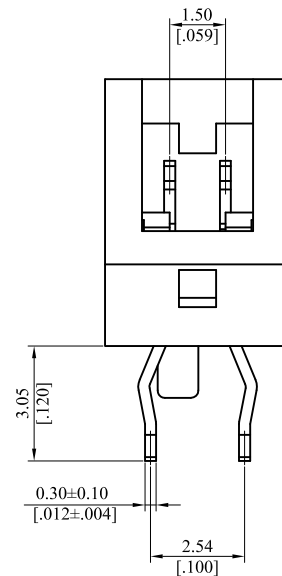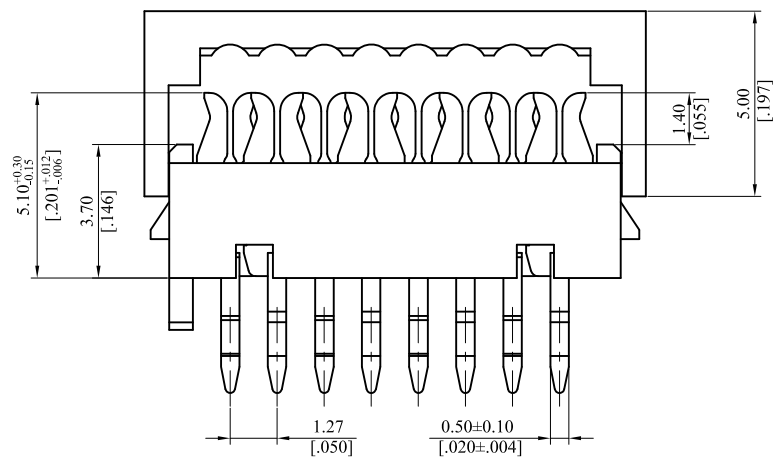

TOLERANCE UNLESS OTHERWISE SPECIFIED			LEOCO CORPORATION http://www.leoco.com.tw	
mm	mm	inch	APPROVED BY:	DATE:
[inch]			Chard	2017.09.28
1 PLACE	± 0.30	± ---	CHECKED BY:	DATE:
2 PLACES	± 0.20	± .012	Jack	2017.09.28
3 PLACES	± 0.10	± .008	DRAWN BY:	DATE:
4 PLACES	± ---	± .004	Samuel	2017.09.28
ANGULAR ±1°			SIZE:	SCALE:
			A3	1:1
			TITLE: 1.27x1.50mm DIP Connectors	
			PART NO.: 1293P**V***	
			DRAWING NO.:	REV.:
			129306S	B
			SHEET:	
			1 OF 1	