

Ordering Information:




1382S ** M ** P
 I 2 3 4

- 1.No. of circuits
- 2.Plating:
 U=Gold flash over 30u"min. nickel overall
 W=15u"min. gold over 30u"min. nickel overall
 Z=30u"min. gold over 30u"min. nickel overall
- 3.Base Height options:
 0: Dim.H=3.40mm(.134")
- 4.P=With Post

Material:

Insulator:Nylon 6T,UL94V-0
 Contact:Phosphor Bronze
 A=1.27mm(.050")*No. of spaces
 B=A+1.65mm(.065")
 C=A+3.15mm(.124")

RoHS COMPLIANT

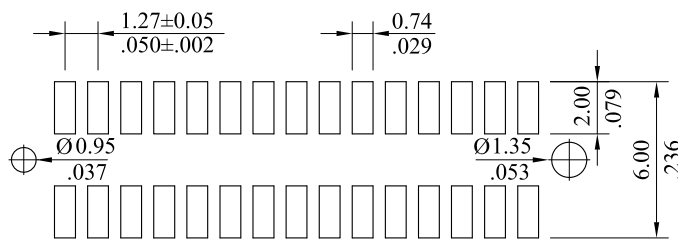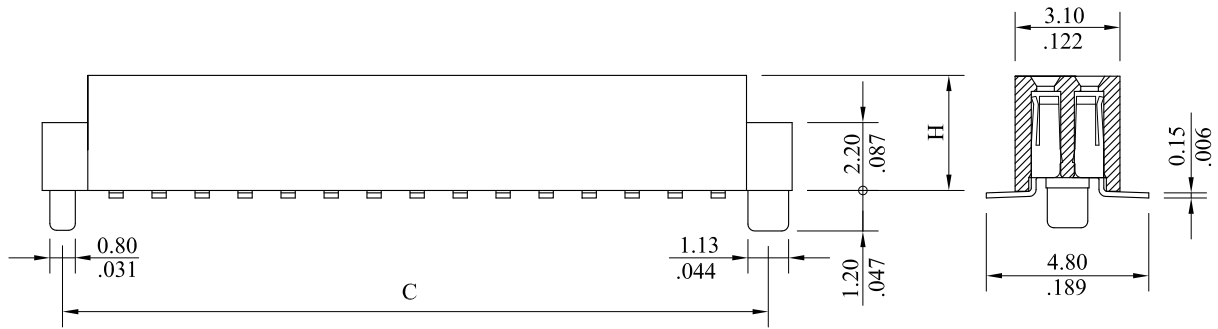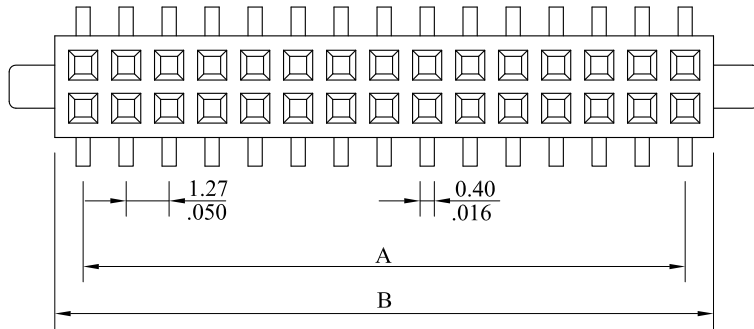

RECOMMENDED HOLE PATTERN

				leoco LEOCO CORPORATION		APPROVED:		PART NO.:					
				GENERAL TOLERANCES: (UNLESS SPECIFIED)		DATE:		1382S**M**P					
D	ES101222					CHECKED:		TITLE:					
						DATE:		SMT Type Connector					
C	ES050826					DRAWN:		DRAWING NO.:					
						DATE:		138205S					
B	E010136							UNITS		SCALE	SIZE	SHEET	REV.
A	DWG REL							mm / inch		4:1	A4	1/1	D
REV.	ECO. NO.	CHG.	APP.	ANGULAR ± (1°)									