
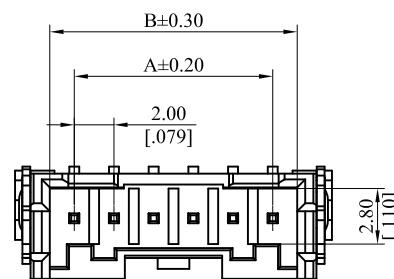







RoHS COMPLIANT

CUSTOMER DRAWING			
REV.	ECO. NO.	DESCRIPTION	DATE
A	DWG. REL.	APPROVED	2017.09.15
B	ES171102	B-6: 03-07P→2-8P	2017.11.1





Note:  
 Material:  
 Insulator: PA9T, UL94 V-0, White  
 Contact: Copper alloy  
 Tab: Copper alloy, Matte Tin plated over nickel overall

General Part Number:  
 2029P\*\*MH\*0  
 1 2  
 1.No. of circuits (2~8P)  
 2.Plating:  
 M= Matte Tin plated 80u"min. over 30u"min. Nickel underplating overall  
 U= Gold flash over 30u" min. Nickel underplating overall

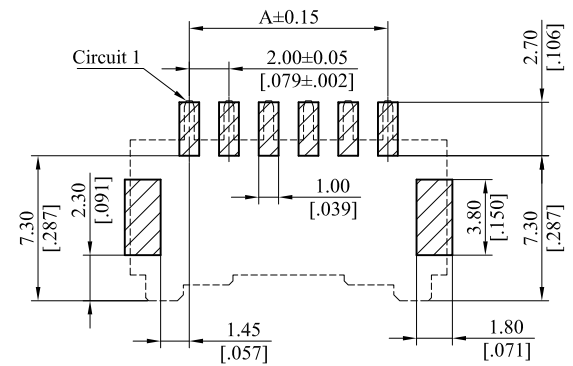

Circuit 1

$A = 2.00\text{mm} * (\text{No. of spaces})$   
 $B = A + 2.46\text{mm}$   
 $C = A + 6.0\text{mm}$

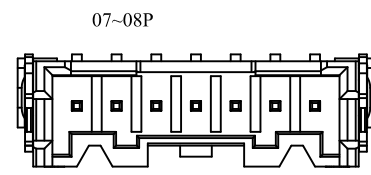

Recommended P.C.B Layout  
 General Tolerance:  $\pm 0.10$

TOLERANCE UNLESS OTHERWISE SPECIFIED			LEOCO CORPORATION		
mm			<a href="http://www.leoco.com.tw">http://www.leoco.com.tw</a>		
[inch]	mm	inch	APPROVED BY:	DATE:	TITLE:
	$\pm 0.30$	$\pm \text{---}$	Chard	2017.11.01	2.0mm Pitch SMT Header Right Angle Type
1 PLACE	$\pm 0.20$	$\pm .012$	CHECKED BY:	DATE:	
2 PLACES	$\pm 0.10$	$\pm .008$	Cedric	2017.11.01	PART NO.: 2029P**MH*0
3 PLACES	$\pm \text{---}$	$\pm .004$	DRAWN BY:	DATE:	
4 PLACES			Jim	2017.11.01	DRAWING NO.: 202908S
ANGULAR $\pm 1^\circ$			SIZE:	SCALE:	
			A3	1:1	B
					SHEET: 1 OF 1