

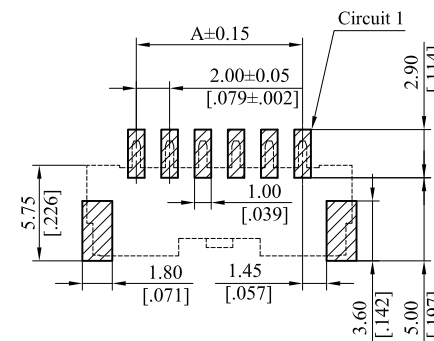








RoHS COMPLIANT

CUSTOMER DRAWING			
REV.	ECO. NO.	DESCRIPTION	DATE
A	DWG. REL.	APPROVED	2017.09.15
B	ES171102	B-6: 03~15P→2~8P	2017.11.1



Recommended P.C.B Layout
 General Tolerance: ± 0.10



Note:

Material:

Insulator: PA9T, UL94 V-0, White

Contact: Copper alloy

Tab: Copper alloy, Matte Tin plated over nickel overall

General Part Number:

2029P**MV*0
 1 2

1.No. of circuits (2~8P)

2. Plating:

M= Matte Tin plated 80u"min. over 30u"min. Nickel underplating overall

U= Gold flash over 30u" min. Nickel underplating overall

$A = 2.00\text{mm} * (\text{No. of spaces})$

$B = A + 2.46\text{mm}$

$C = A + 6.0\text{mm}$

TOLERANCE UNLESS OTHERWISE SPECIFIED			LEOCO CORPORATION http://www.leoco.com.tw		
mm	mm	inch	APPROVED BY:	DATE:	TITLE:
[inch]			Chard	2017.11.01	2.0mm Pitch SMT Header Vertical Type
1 PLACE	± 0.30	$\pm \text{---}$	CHECKED BY:	DATE:	
2 PLACES	± 0.20	$\pm .012$	Cedric	2017.11.01	PART NO.: 2029P**MV*0
3 PLACES	± 0.10	$\pm .008$	DRAWN BY:	DATE:	
4 PLACES	$\pm \text{---}$	$\pm .004$	Jim	2017.11.01	DRAWING NO.: 202907S
ANGULAR $\pm 1^\circ$			SIZE: A3	SCALE: 1:1	REV.: B
					SHEET: 1 OF 1