

Material:

* Insulator : UL 94V-0 PA6T+30%GF

* Contact : Phosphor bronze

Ordering Information:

2041 S ** H * 00
1 2

RoHS COMPLIANT

1. No. of Circuits


2. Contact Plating:

T= Tin plated 120u" min. over 30u"min. nickel overall

U= Gold flash over 30u"min. nickel overall

W= 15u"min. gold over 30u"min. nickel overall

Z= 30u"min. gold over 30u"min. nickel overall

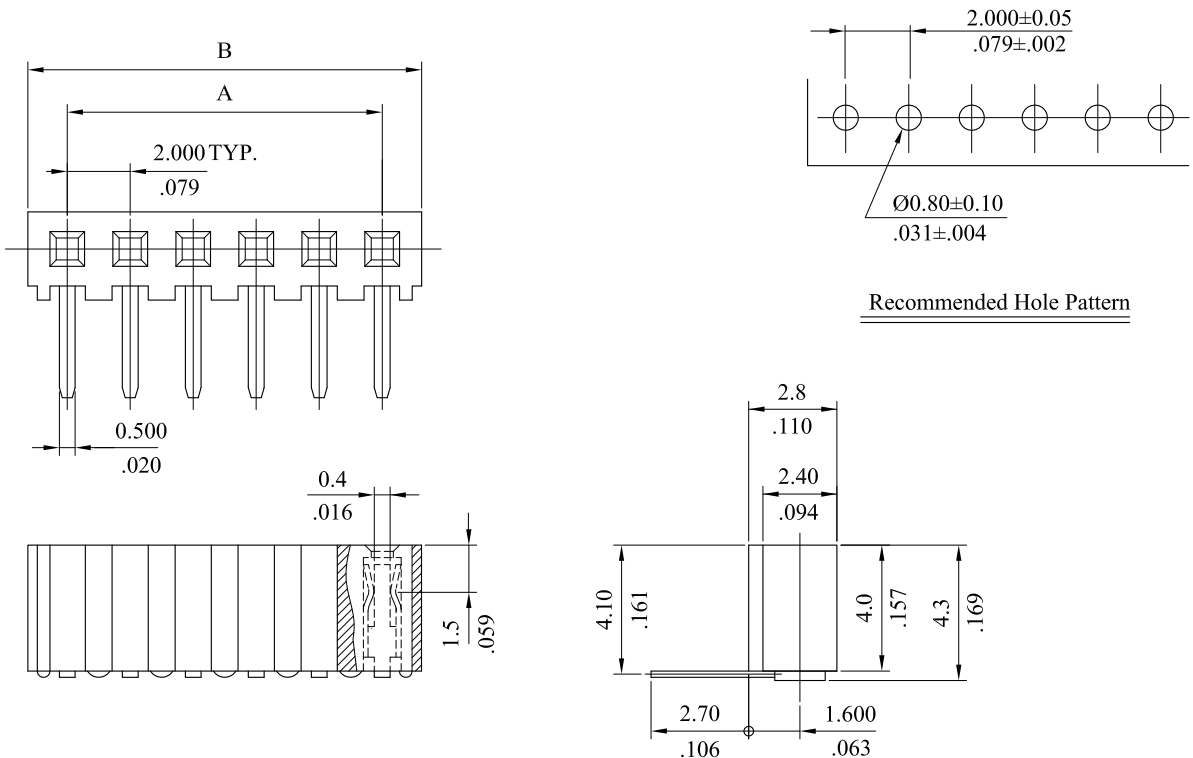

Circuits	Dim A	Dim B	Circuits	Dim A	Dim B
02	2.000(.079)	4.5(.177)	17	32.000(1.260)	34.5(1.358)
03	4.000(.157)	6.5(.256)	18	34.000(1.339)	36.5(1.437)
04	6.000(.236)	8.5(.335)	19	36.000(1.417)	38.5(1.516)
05	8.000(.315)	10.5(.414)	20	38.000(1.496)	40.5(1.594)
06	10.000(.394)	12.5(.492)	21	40.000(1.575)	42.5(1.673)
07	12.000(.472)	14.5(.571)	22	42.000(1.654)	44.5(1.752)
08	14.000(.551)	16.5(.650)	23	44.000(1.732)	46.5(1.831)
09	16.000(.630)	18.5(.728)	24	46.000(1.811)	48.5(1.909)
10	18.000(.709)	20.5(.807)	25	48.000(1.890)	50.5(1.988)
11	20.000(.787)	22.5(.886)	26	50.000(1.969)	52.5(2.067)
12	22.000(.866)	24.5(.965)	27	52.000(2.047)	54.5(2.146)
13	24.000(.945)	26.5(1.043)	28	54.000(2.126)	56.5(2.224)
14	26.000(1.024)	28.5(1.122)	29	56.000(2.205)	58.5(2.303)
15	28.000(1.102)	30.5(1.201)	30	58.000(2.283)	60.5(2.382)
16	30.000(1.181)	32.5(1.280)	40	78.000(3.071)	80.5(3.169)

leoco LEOCO CORPORATION

GENERAL TOLERANCES:
(UNLESS SPECIFIED)

	mm	inch
1 PLACE	± 0.30	± --
2 PLACES	± 0.20	± .012
3 PLACES	± 0.10	± .008
4 PLACES	± --	± .004

ANGULAR ± (1°)

APPROVED:

DATE:

CHECKED:

DATE:

DRAWN:

DATE:


PART NO.:

2041S**H*00

TITLE: 2.00mm(.079")
Single Row
PCB Connector

DRAWING NO.:

204104S



UNITS
mm
inch

SCALE	SIZE	SHEET	REV.
4:1	A4	1/1	B

REV.	ECO. NO.	CHG.	APP.
B	ES101222		
A	DWG REL		