


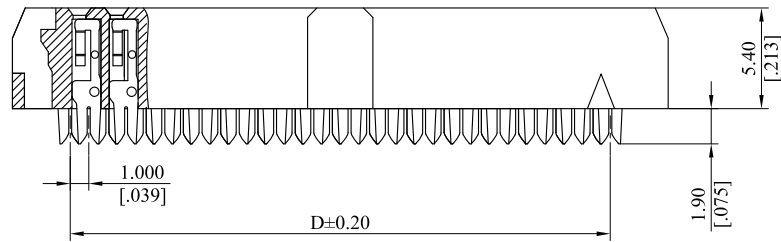


RoHS COMPLIANT

CUSTOMER DRAWING

REV.	ECO. NO.	DESCRIPTION	DATE
C	ES101222		
D	ES180506	Brass→Phosphor Bronze	2018.05.09

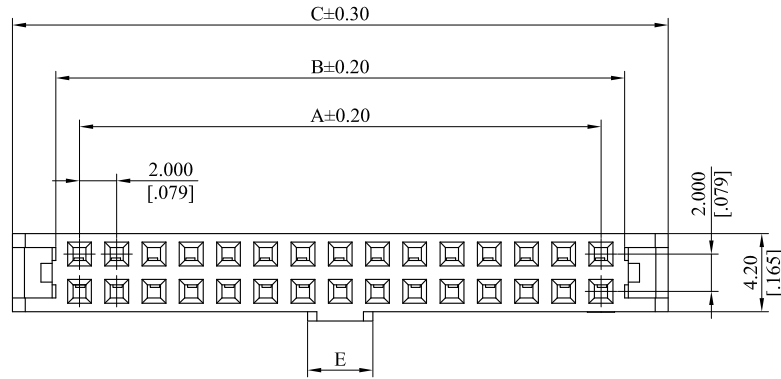

Note:
 Material:
 Insulator: Thermoplastic, UL94 V-0, Black
 Contact: Phosphor Bronze/Gold flash

General Part Number:
 2045S**U000
 1
 1. No. of circuits(06~64)

A=2.00mm(.079")*No. of spaces
 B=A+2.54mm(.100")
 C=A+7.20mm(.283")
 D=A+1.00mm(.039")
 E=2.0mm(.079") (6P~8P)
 E=3.5mm(.138") (10P~64P)

TOLERANCE UNLESS OTHERWISE SPECIFIED			LEOCO CORPORATION <i>http://www.leoco.com.tw</i>		
mm	mm	inch	APPROVED BY:	DATE:	TITLE:
[inch]			Chard	2018.05.09	2.00mm Pitch I.D.C Socket
1 PLACE	± 0.30	± --	CHECKED BY:	DATE:	
2 PLACES	± 0.20	± .012	Spring	2018.05.09	PART NO.: 2045S**U000
3 PLACES	± 0.10	± .008	DRAWN BY:	DATE:	
4 PLACES	± --	± .004	Shirley	2018.05.09	DRAWING NO.: 204502S
ANGULAR ±1°			SIZE:	SCALE:	REV.:
			A3	1:1	D
					SHEET: 1 OF 1