

RoHS COMPLIANT

Material :

* Insulator: Nylon-6T, UL 94V-0

* Contact: Phosphor Bronze

Ordering Information:

2084 S ** H * 00
 $\frac{1}{1} \frac{2}{2}$

1. No. of Circuits

14= 14 Circuits



2. Plating:

T= Tin plated 100u"min. over 30u"min. nickel overall

U= Gold flash over 30u"min. nickel overall

W= 15u"min. gold over 30u"min. nickel overall

Z= 30u"min. gold over 30u"min. nickel overall

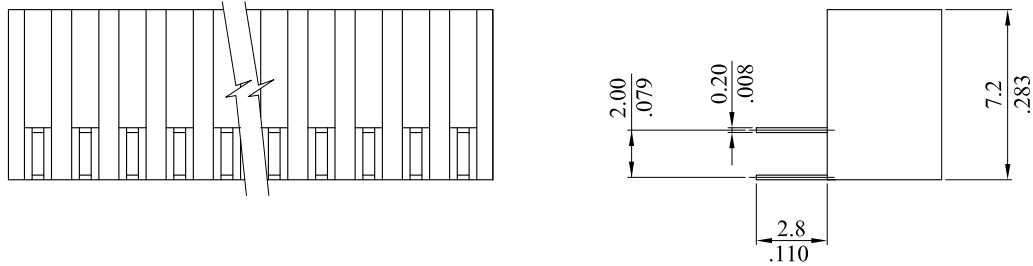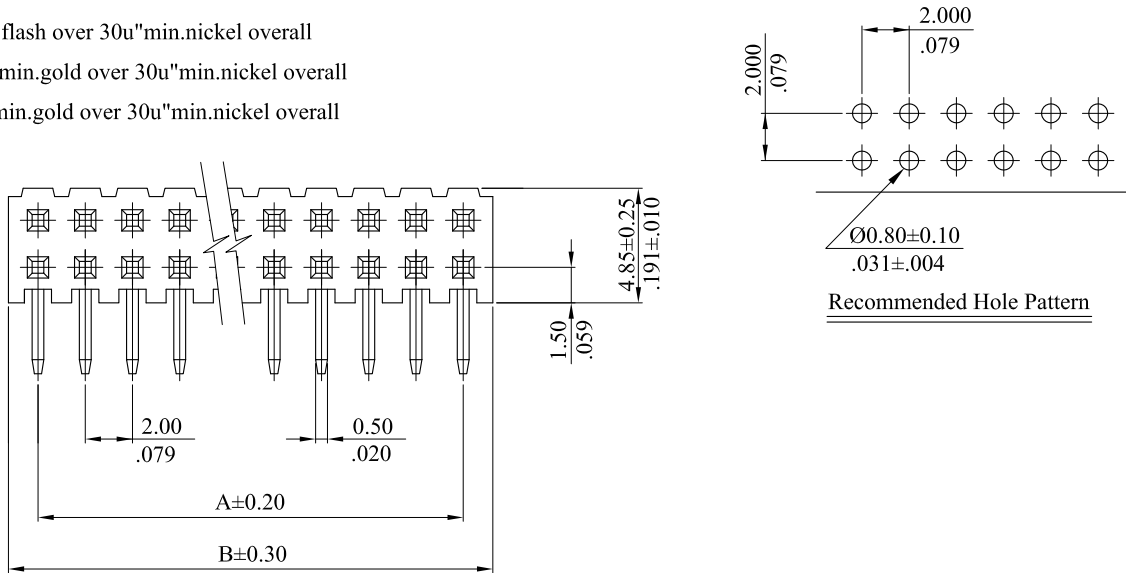

| Circuits | Dim. A | Dim. B | Circuits | Dim. A | Dim. B | Circuits | Dim. A | Dim. B |
|----------|-------------|--------------|----------|--------------|--------------|----------|--------------|--------------|
| 2 | / | 2.50(.098) | 30 | 28.00(1.102) | 30.50(1.201) | 58 | 56.00(2.205) | 58.50(2.291) |
| 4 | 2.00(.079) | 4.50(.177) | 32 | 30.00(1.181) | 32.50(1.280) | 60 | 58.00(2.283) | 60.50(2.382) |
| 6 | 4.00(.157) | 6.50(.256) | 34 | 32.00(1.300) | 34.50(1.358) | 62 | 60.00(2.362) | 62.50(2.461) |
| 8 | 6.00(.236) | 8.50(.335) | 36 | 34.00(1.339) | 36.50(1.437) | 64 | 62.00(2.441) | 64.50(2.539) |
| 10 | 8.00(.315) | 10.50(.413) | 38 | 36.00(1.417) | 38.50(1.516) | 66 | 64.00(2.520) | 66.50(2.618) |
| 12 | 10.00(.394) | 12.50(.492) | 40 | 38.00(1.496) | 40.50(1.594) | 68 | 66.00(2.598) | 68.50(2.697) |
| 14 | 12.00(.472) | 14.50(.571) | 42 | 40.00(1.575) | 42.50(1.673) | 70 | 68.00(2.677) | 70.50(2.756) |
| 16 | 14.00(.551) | 16.50(.650) | 44 | 42.00(1.653) | 44.50(1.752) | 72 | 70.00(2.756) | 72.50(2.854) |
| 18 | 16.00(.630) | 18.50(.728) | 46 | 44.00(1.732) | 46.50(1.831) | 74 | 72.00(2.835) | 74.50(2.933) |
| 20 | 18.00(.709) | 20.50(.807) | 48 | 46.00(1.811) | 48.50(1.909) | 76 | 74.00(2.913) | 76.50(3.012) |
| 22 | 20.00(.787) | 22.50(.886) | 50 | 48.00(1.890) | 50.50(1.988) | 78 | 76.00(2.992) | 78.50(3.091) |
| 24 | 22.00(.866) | 24.50(.965) | 52 | 50.00(1.969) | 52.50(2.067) | 80 | 78.00(3.071) | 80.50(3.169) |
| 26 | 24.00(.945) | 26.50(1.043) | 54 | 52.00(2.047) | 54.50(2.146) | | | |
| 28 | 26.00(.024) | 28.50(1.122) | 56 | 54.00(2.126) | 56.50(2.224) | | | |

| | | | | | | | | | | |
|------|----------|------|------|-------------------------|----------------|------------------------------------|------|-------|------|---|
| E | ES110513 | | | LECO CORPORATION | APPROVED: | PART NO.: 2084S**H*00 | | | | |
| D | ES101222 | | | | DATE: | TITLE: 2.00mm(.079") PCB Connector | | | | |
| C | ES060132 | | | | CHECKED: | DRAWING NO.: 208401S | | | | |
| B | ES050359 | | | | DATE: 11.06.20 | DRAWN: JIAO | | | | |
| A | DWG REL | | | DATE: 11.06.20 | UNITS | SCALE | SIZE | SHEET | REV. | |
| REV. | ECO. NO. | CHG. | APP. | ANGULAR ± (1°) | | mm inch | 3:1 | A4 | 1/1 | E |