

Ordering Information :

2611 S *** 00 A
 $\frac{1}{2}$

1. No. of circuits

Available in 2 through 40 circuits

2. Plating :

T=Tin plated 120 μ " min over 30 μ " min. nickel overall

U=Gold flash over 30 μ " min. nickel overall

W= 15 μ " min. gold over 30 μ " min. nickel overall

Z= 30 μ " min. gold over 30 μ " min. nickel overall



*** 2611 Series ***

Material :



* Insulator : Nylon 6/6, UL 94V-0

* Contact : Phosphor Bronze

RoHS COMPLIANT

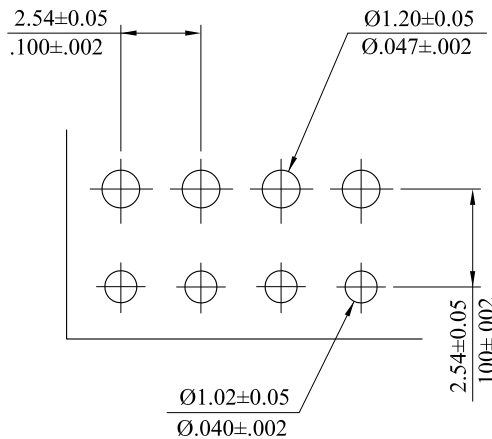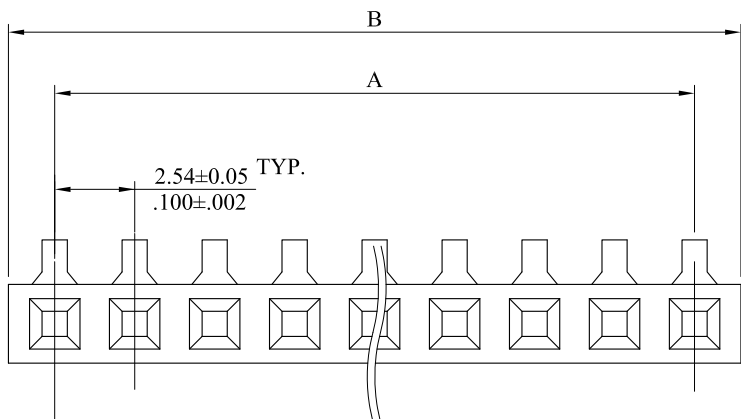

Recommended hole pattern

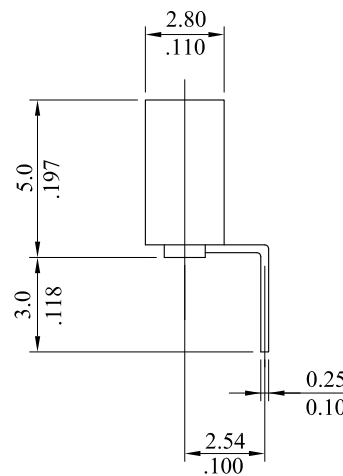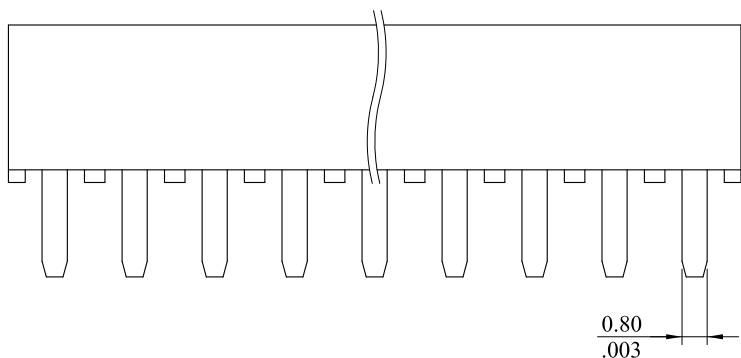

Dim.A = 2.54mm × No. of spaces

Dim.B = Dim.A + 2.54mm+0.50mm

				LECO CORPORATION	APPROVED:		PART NO.:					
					GENERAL TOLERANCES: (UNLESS SPECIFIED)		DATE:		2611S***00A			
						CHECKED:		TITLE:				
						DATE:		HEADER				
						DRAWN:		DRAWING NO.:				
						DATE:		261102S				
REV.	ECO. NO.	CHG.	APP.	1 PLACE	± 0.30	± --		UNITS	SCALE	SIZE	SHEET	REV.
				2 PLACES	± 0.20	± .012		$\frac{mm}{inch}$	4:1	A4	1/1	D
				3 PLACES	± 0.10	± .008						
				4 PLACES	± --	± .004						
				ANGULAR		± (1°)						